

Wireless transmission

Dongle Smart

DESCRIPTION

A

- Possibility to connect up to 8 instruments per dongle
- Duplex data transmission
- Plug and play !
- Individual identification of each instrument with *Bluetooth®* wireless technology
- Automatic detection of instruments



TECHNICAL SPECIFICATIONS

		981-7100
USB		•
Coupled instruments per module		8
Automatic detection of instrument		•
Instruments and software compatibility		D300S & Sylcom & Vmux
Transmission distance ¹⁾	m	15

¹⁾ depends on the environment.



Wireless transmission

S_Footswitch Smart

DESCRIPTION



FOOTPEDAL SMART

- Robust footpedal with Bluetooth® wireless technology
- IP rating IP53
- Battery life : 3 years (Battery CR2477)
- Possibility of triggering sequences from the software Vmux & Sylcom



A

Status LED (low battery, Bluetooth® transmission)

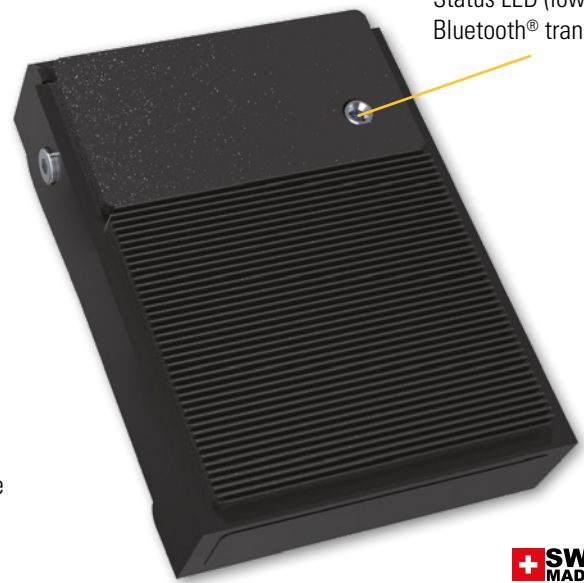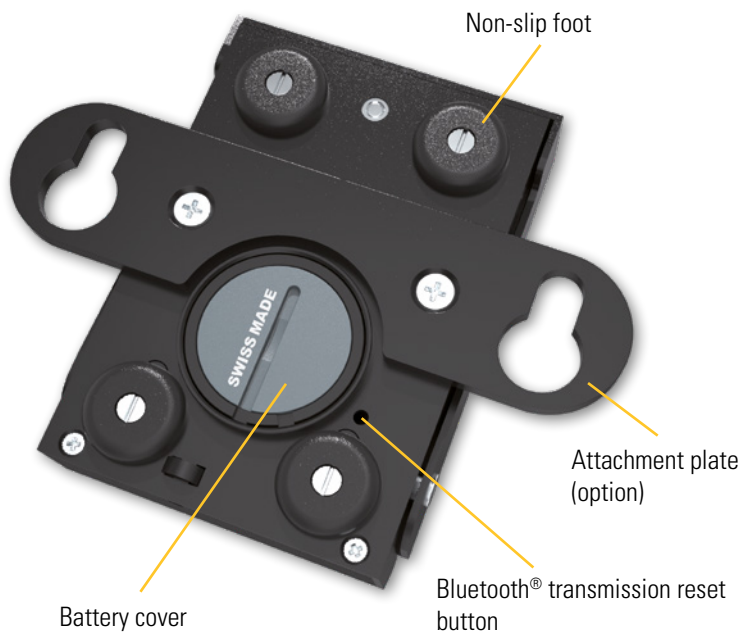

Dongle with Bluetooth® Wireless technology 981.7100



TECHNICAL SPECIFICATIONS

S_Footswitch Smart		926-7022
Connection		Bluetooth® wireless technology*
Weight	g	260
Software compatibility		Vmux (1.37 and later) and Sylcom
Transmission distance ¹⁾	m	up to 15m

¹⁾ depends on the environment

* Connection with dongle #981.7100

Accessories		926-7023	985-2217
Description		Fixing plate	Adapter for battery CR2032
Weight	g	85	5


Wireless transmission

Battery Pack

DESCRIPTION

A

- External power-supply for instruments with Bluetooth® wireless technology
- Compatible with all instruments with Power-RS and Power-USB connections
- Battery type CR2477, 3V
- Cable length : about 150mm

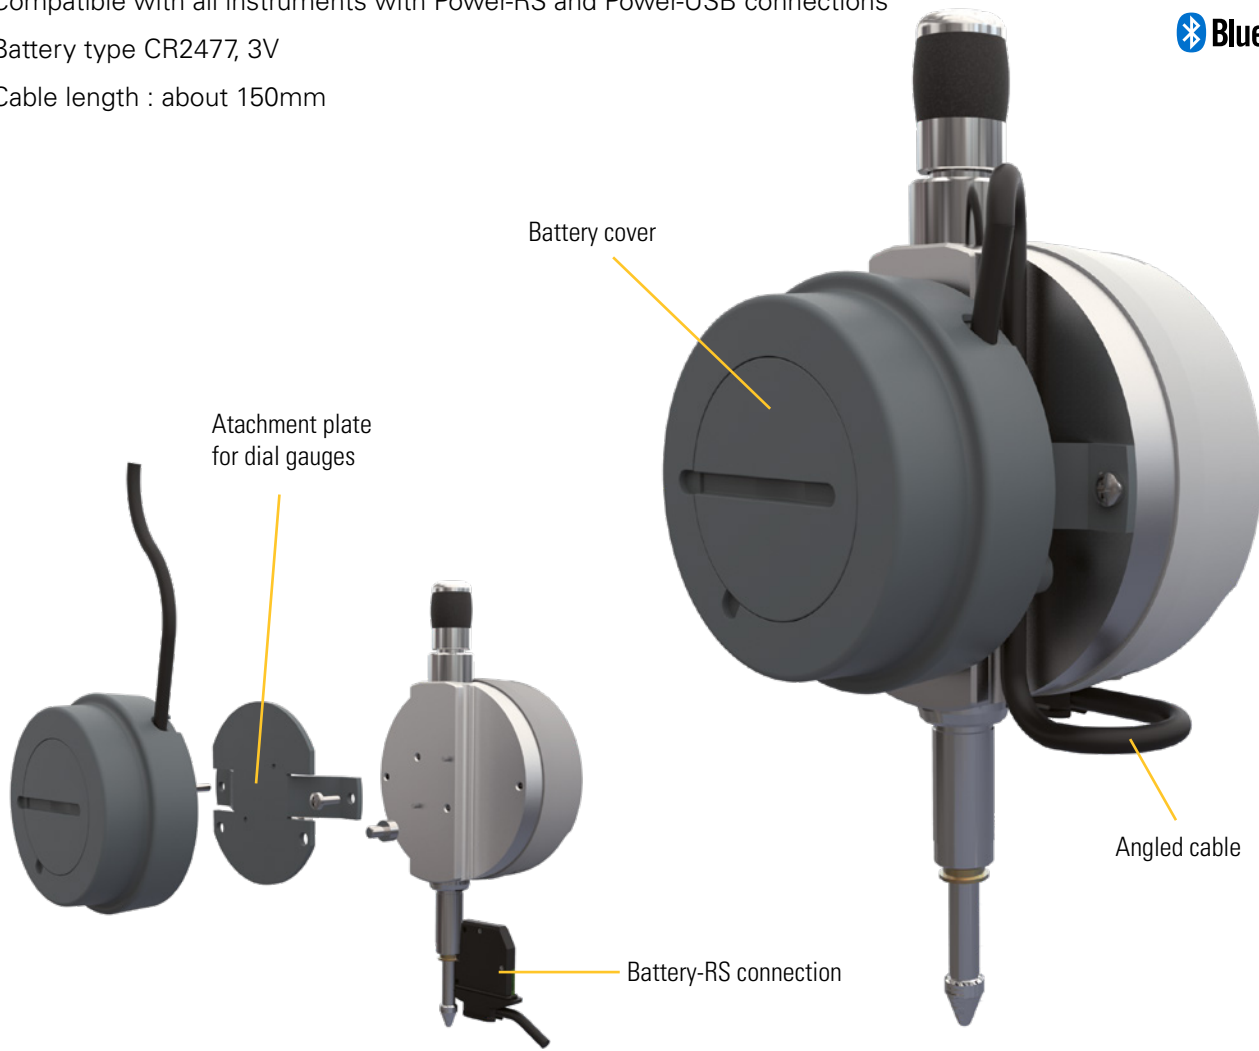

TECHNICAL SPECIFICATIONS

Battery Pack		926-7024
Connections		Power-RS / Battery-RS
Weight	g	71.6 (91.4g with attachment plate)
Capacity max.	mAh	1000
Clamping		compatible with dial gauges Ø60mm
Cable length	mm	150

Accessories		985-2217
Description		Adapter for battery CR2032
Weight	g	5



Other

BATTERIES

A

Order number and compatibilities



Battery CR2032	985-2215 Calipers S_Cal, ultra-light calipers ULX4 ¹⁾ , dial gauges S_Dial (except PLC), micrometers, bore gauges, digital scale S_Scale digital micrometer screws, Feeler Gage, depth gauges S_Depth, Protractor, Hi_Gage, footpedal Smart ¹⁾ and benches table PS16 V2 ¹⁾
Battery CR2477	985-2216 Ultra-light calipers ULX4, benches table PS16 V2, footpedal Smart, Battery Pack

¹⁾ With adapter

Cables

S_Connect










CONNECTION

A

Our cables are available in various lengths indicated below.

On request, we can deliver our special length cables, within the following limits:

- RS232 cables: maximum length 15 meters
- USB cable: maximum length 7 meters.
- Special length cable on request : 926.1999.99

		Standard 2 m	Standard 3 m	Standard 5 m	≤15 m	Bi-directional
	Opto RS	926-5521	--	--	926-5535	
	Opto RS	926-6521	--	--	926-6535	●
	Opto RS	926-6538	--	--	926-6542	●
	Opto RS	926-6539	--	--	926-6543	●
	Opto USB	926-6621	--	--	1)	●
	Power RS	--	905-4516	--	905-4519	●
	Power RS (bent)	--	905-4538	--	1)	●
	Power USB	--	926-6821	--	1)	●
	Power USB (bent)	--	926-6838	--	1)	●
	PLC digital indicator	--	--	926-6101	--	--

¹⁾ Maximum 7m (Standard 5m)



Cables

S_Connect

CONNECTION

A

S_Cal Pro / S_Mike Pro / S_Cal EVO Proximity	UL4	S_Depth PRO S_Scale WORK / S_Scale EVO	Protractor	S_Dial S233 / S234 / S_Dial MINI / S_Dial TEST	S_Dial PRO / S_Dial WORK Hi_Gage ONE	Xtreme	Digital microscrew	Hi_Cal	PS16 VS	S_View D50S / D80S PC output	S_View D200S	D300S instr. input	D300S output PC	D302 / D304	D400S	D70S/H//A	S_Dial WORK PLC
•									•			•					
									•			•					
									•			•					
									•			•					
									•			•					
		•	•	•	•	•	•					•					
		•	•	•	•	•	•					•					
		•	•	•	•	•	•					•					
		•	•	•	•	•	•					•					
																	•

Cables

S_Connect

CONNECTION

A

	Standard 2 m	Standard 3 m	≤15 m	Bi-directional
	--	926-6723	¹⁾	●
	--	926-6721	¹⁾	●
	--	925-5609	¹⁾	●
	--	804-1210	--	●
	--	926-6001	--	●
	925-1142*	--	--	●
	--	925-1143 ²⁾	--	●
	--	926-5505	--	●
	--	804-2201	--	●
	--	804-2204	--	●
	--	804-2205	--	

¹⁾ Maximum 7m (Standard 5m)

²⁾ must be connected with bi-directional cables only

* The D70 and D400S do not work on Vmux with this adapter



Cables

S_Connect

CONNECTION

S_Cal Pro / S_Mike Pro / S_Cal EVO Proximity	UL4	S_Depth PRO / S_Scale WORK / S_Scale EVO	Mesureur d'angles	S_Dial S233 / S234 / S_Dial MINI / S_Dial TEST	S_Dial ONE / S_Dial WORK	Hi_Gage ONE	PS16 V2	Digital microscrew	Hi_Cal	PS16 V1 VS	S_View D50S / D80S PC output	S_View D200S	D300S instr. input	D300S output PC	D302 / D304	D400S	D70 H/I	D70 S	D70 A	D62S	Xtreme 3	M-Bus (except RS)	Z5
•	•		•		•	•							•								•		
•	•		•		•	•							•								•		
									•		•	•	6)		•	•	4)	•		•		•	
												•		•		•							
							•		•						•					•			•
3)	3)	3)	3)	3)	3)			3)	3)	3)	•	•				•	5)	•	5)	•	5)		
3)	3)	3)	3)	3)	3)			3)		3)										•	3)		
																							•
																		•	7)		•	7)	
																	•	8)		•	8)		
																			•	9)			

³⁾ must be connected with RS232 cables

⁴⁾ For MB-XX module and RS232 PC connections

⁵⁾ RS232 connection to PC (D70S version and D400S only) bidirectional. Versions D70I/H require a crossover RS232 cable.

⁶⁾ Not working on PC

⁷⁾ Update of the units

⁸⁾ Crossover cable for PC connection

⁹⁾ Connection cable for MB-I/O